


Shut-off damper

DTMU



Dimensions

DTMU

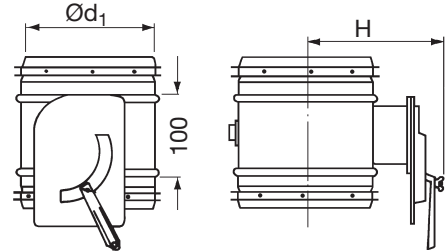

Description

DTMU are tight-closing shut-off dampers. The dampers can be used to completely shut off the air flow.

The blade consists of double sheet metal with an intermediate sealing of EPDM-rubber, which is in contact with the inside of the damper housing when in the closed position.

DTMU is equipped with a handle and a locking mechanism for stepless adjustment of 0–90° without tools.

There is a separate assembly, measuring, technical data and maintenance instruction for this product.

Ø 80–315 fullfills pressure class C in closed position.

Ø 355–630 fullfills pressure class B in closed position.

| Ød ₁ nom | H [mm] | m [kg] | Sealing class past closed blade |
|------------------------|-----------|-----------|------------------------------------|
| 80 | 95 | 0,80 | 4 |
| 100 | 105 | 0,90 | 4 |
| 112 | 110 | 0,90 | 4 |
| 125 | 118 | 1,00 | 4 |
| 140 | 125 | 1,00 | 4 |
| 150 | 130 | 1,10 | 4 |
| 160 | 135 | 1,10 | 4 |
| 180 | 145 | 1,30 | 4 |
| 200 | 155 | 1,40 | 4 |
| 224 | 165 | 1,60 | 4 |
| 250 | 180 | 1,90 | 4 |
| 280 | 195 | 2,20 | 4 |
| 300 | 205 | 2,40 | 4 |
| 315 | 215 | 2,60 | 4 |
| 355 | 240 | 3,10 | 4 |
| 400 | 260 | 3,90 | 4 |
| 450 | 285 | 4,50 | 4 |
| 500 | 310 | 5,20 | 4 |
| 560 | 340 | 6,20 | 4 |
| 600 | 360 | 7,20 | 4 |
| 630 | 375 | 8,10 | 4 |

Technical data

For technical data go to [LindQST](#).

Ordering example

| | | |
|---------------------------|------|-----|
| Product | DTMU | 250 |
| Dimension Ød ₁ | | |

