

Axial Smooth Fascia

ASF




Description

An axial fan with smooth fascia to extract the air directly through the wall or ceiling with little or no duct run. Standard version with options of, Timer, humidity sensor. Made of ABS material and has IP24 protection.

Alternate Versions:


- ASF-B As above
- ASF-T Automatic run on timer with setting of 2-30 minutes
- ASF-HT Automatically starts the fan when the humidity raises above the preset level. Settings available from 60%-90% RH

Dimensions

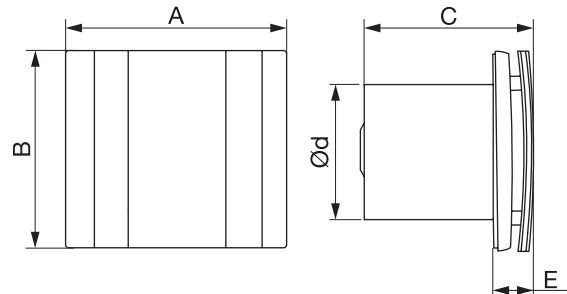

Product	A [mm]	B [mm]	C [mm]	Ød [mm]	E [mm]	m [kg]
ASF100	171	151	128	100	32	0,75
ASF125	201	178	136	125	35	0,98
ASF150	265	207	157	150	38	1,29

Ordering example

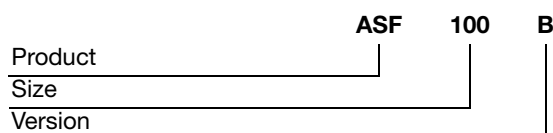


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

Axial Smooth Fascia


ASF

Technical data


• ASF 100

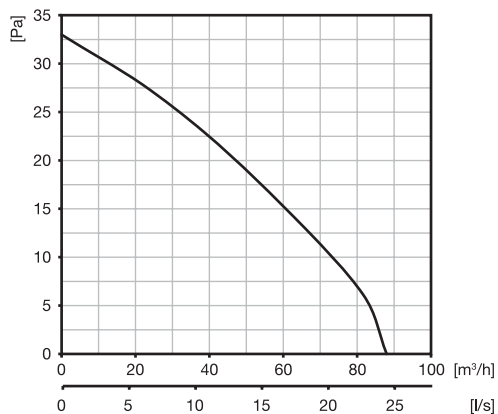

• ASF 125

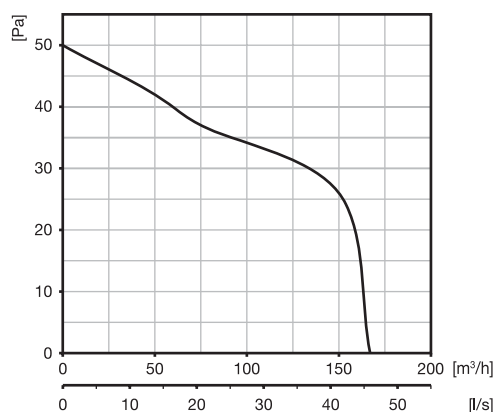

• ASF 150

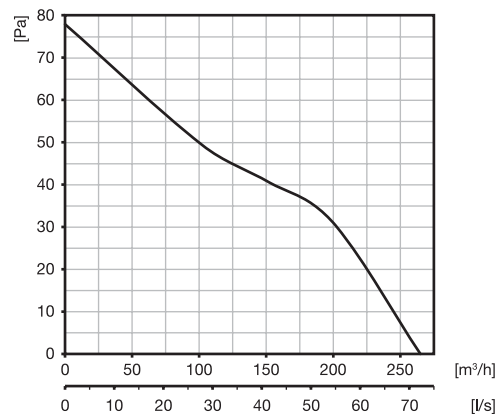

Technical data

Product	Frequency Hz	Voltage V	Electric Power Input W	Current A	r.p.m	Maximum air capacity m³/h	Sound pressure level at 3 m dB(A)	Max. operating temperature °C	SEC class	IP
ASF 100	50	220-240	14	0,085	2300	88	33	+40	*	24
ASF 125	50	220-240	16	0,100	2400	167	34	+40	*	24
ASF 150	50	220-240	24	0,130	2400	265	37	+40	*	24

(*): Regulation 1254/2014 does not apply if electric power input < 30 W